

Colombini TA150/200

For direct feed of single dose packaging machines; medium productions, including continuous cycle over several shifts.

Uses:

- Direct feeding of single dose packaging machines, up to 200 pods-caps per minute
- Medium single dose production including continuous cycle over several shifts

Technical characteristics:

- Outfeed extractor mixer
- Continuous automatic lubrication
- Remote adjustment of distance between grinding discs with 0.005 mm resolution
- Electrical control panel with micro PLC (integrated operator panel)
- Cutting speed adjustment
- Possibility of manual adjustment of rough grinding
- No cooling system needed
- Total power consumption: 5 kW
- Working energy consumption: 2-2.5 kWh
- Weight approx. 130 kg - 285 lbs (anodized light alloy)
- Capacity:
 - Coffee: up to 200 mono-doses per minute



The science of grinding, since 1970.

TA150/200

COLOMBINI
La scienza della macinazione

TA150/200 controls and accessories





Electrical switchboard:

- Micro PLC
- Integrated operator panel
- Timed opening/closing of product entry valve and management of grind feed delays
- Grinding tool calibration
- Machine block control in the event of anomalous product output temperatures and current absorption
- Management of grind level and gaseous nitrogen entry
- Hours worked counter
- Inverter to adjust main motor speed



Granule feed system:

- Vacuum pneumatic transfer
- Maximum capacity 200 kg/h - 440 lbs/h of roasted coffee
- Complete with pick-up bar and food-grade electro-conductor coiled hose

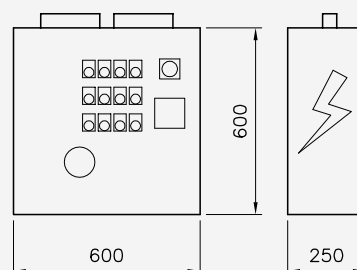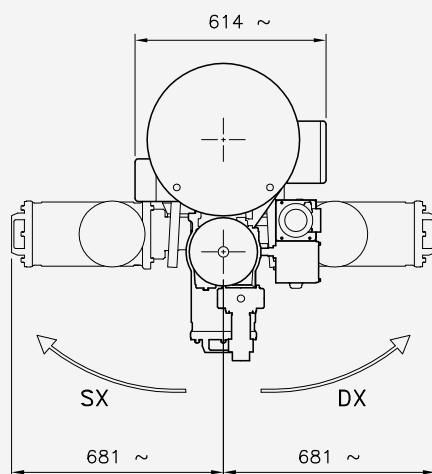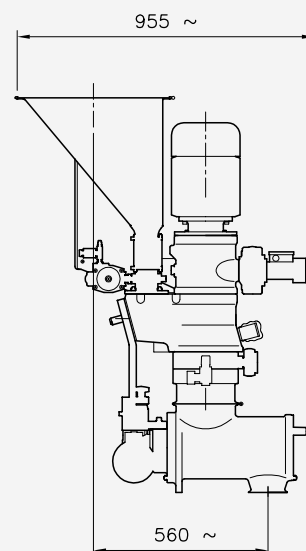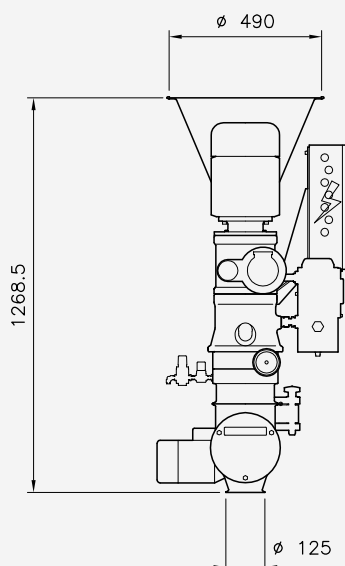

This technical information is subject to change without prior notice. It is strictly confidential and may not be disseminated without the prior written consent of Colombini Srl. For further information and to purchase products, contact the sole authorized distributor.

Colombini Srl

via De Francisco, 130/16
 10036 Settimo T.se (TO) Italy
 tel +39 (0) 118211407 fax +39 (0) 118958221
 info@colombini.srl www.colombini.srl